

Big TowTM

TRAILERS

MODELS:
B-5T, B-6T, B-7T, B-8T
TILT TRAILER

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.



Shown with optional stationary deck.


B-5T, B-6T, B-7T, B-8T

866-397-8481

Fax: 320-693-7921

www.bigtowtrailers.com



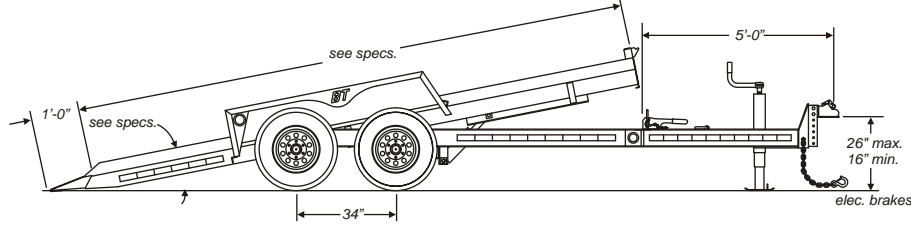

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for more information.

*Optional 4 ft. stationary deck shown on front.

Specifications	B-5T	B-6T	B-7T	B-8T
WEIGHT (lbs/kg)	3100 or 3200 or 3300 / 1406 or 1497 or 1588	3200 or 3300 or 3400 / 1451 or 1496 or 1541	4700 or 4900 / 2132 or 2223	4900 or 5100 / 2223 or 2314
CAPACITY (lbs/kg)	10,000 / 4563 w/adequate hitch load	12,000 / 5443 w/adequate hitch load	14,000 / 6350 w/adequate hitch load	16,000 / 7257 w/adequate hitch load
DECK LENGTH (ft-in/mm)	14'-0" / 4267 or 16'-0" / 4877 or 18'-0" / 5486	14'-0" / 4267 or 16'-0" / 4877 or 18'-0" / 5486	16'-0" / 4877 or 18'-0" / 5486	16'-0" / 4877 or 18'-0" / 5486
DECK HEIGHT (in/mm)	20.5" / 521 empty	21.5" / 546 empty	21.5" / 546 empty	21.5" / 546 empty
OVER-ALL WIDTH (ft-in/mm)	8'-6" / 2591	8'-6" / 2591	8'-6" / 2591	8'-6" / 2591
LOAD WIDTH (in/mm)	82" / 2083 between fenders	82" / 2083 between fenders	82" / 2083 between fenders	80" / 2032 between fenders
TONGUE LENGTH (ft-in/mm)	5'-0" / 1524	5'-0" / 1524	5'-0" / 1524	5'-0" / 1524
TILT ANGLE (degrees)	12 / 11 / 10	12 / 11 / 10	11 / 10	11 / 10
TILT CUSHION	(1) 3.5" x 8" cushion cylinder	(1) 3.5" x 8" cushion cylinder	(1) 3.5" x 8" cushion cylinder	(1) 3.5" x 8" cushion cylinder
DECK TYPE	2" nominal white oak	2" nominal white oak	2" nominal white oak	2" nominal white oak
BRAKES	Electric, w/wet-cell break-away system (12"x2")	Electric, w/wet-cell break-away system (12"x2")	Electric, w/wet-cell break-away system (12.25"x2.5")	Electric, w/wet-cell break-away system (12.25"x3.38")
TIRES	(4) ST225/75R x 15, load range D	(4) 235/85R x 16, 10 ply, load range E	(4) 215/75R x 17.5, 16 ply, load range H	(4) 215/75R x 17.5, 16 ply, load range H
WHEELS	(4) 6" x 15" white modular (6 bolt on 5.5" b.c.)	(4) 6" x 16" white modular (8 bolt)	(4) 6.75" x 17.5" (8 bolt)	(4) 6.75" x 17.5" (8 bolt)
AXLES	(2) 6,000 lb. Torflex w/E-Z lube hubs	(2) 6,000 lb. Torflex w/E-Z lube hubs	(2) 7,200 lb. Torflex w/E-Z lube hubs	(2) 8,000 lb. Torflex w/E-Z lube hubs
HITCH	Adj., 2-5/16" ball coupler or 3" I.D. pintle	Adj., 2-5/16" ball coupler or 3" I.D. pintle	Adj., 2-5/16" ball coupler or 3" I.D. pintle	Adj., 2-5/16" ball coupler or 3" I.D. pintle
TIE DOWNS	(6) Heavy-duty D-rings, 3 per side	(6) Heavy-duty D-rings, 3 per side	(6) Heavy-duty D-rings, 3 per side	(6) Heavy-duty D-rings, 3 per side
PARKING JACK	Single 12K drop leg, bolted on	Single 12K drop leg, bolted on	Single 12K drop leg, bolted on	Single 12K drop leg, bolted on
SAFETY CHAINS	3/8" high tensile x 40" w/hooks and latches	3/8" high tensile x 40" w/hooks and latches	3/8" high tensile x 40" w/hooks and latches	3/8" high tensile x 40" w/hooks and latches
TOOL BOX	Std. (Lid optional)	Std. (Lid optional)	Std. (Lid optional)	Std. (Lid optional)
MUD FLAPS	Std.	Std.	Std.	Std.
MAIN FRAME	High tensile W6 x 12 beam, cold formed tongue	High tensile W6 x 12 beam, cold formed tongue	High tensile W6 x 12 beam, cold formed tongue	High tensile W6 x 12 beam, cold formed tongue
HEAD BOARD	4" high	4" high	4" high	4" high
X-MEMBERS	3" channel iron, 16" o.c.	3" channel iron, 16" o.c.	3" channel iron, 16" o.c.	3" channel iron, 16" o.c.
WIRING	Sealed modular harness	Sealed modular harness	Sealed modular harness	Sealed modular harness
LIGHTING (reflectorized)	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
REG. HOLDER	Std.	Std.	Std.	Std.
FINISH (before decking)	5-stage polyurethane under/over coat	5-stage polyurethane under/over coat	5-stage polyurethane under/over coat	5-stage polyurethane under/over coat
"SL" RAMP OPTION	16" wide x 3'-0" long, mesh top, 8 deg. Incline on ramps. Tilt angle: 11 / 10 / 9	16" wide x 3'-0" long, mesh top, 8 deg. Incline on ramps. Tilt angle: 11 / 10 / 9	N/A	N/A
OPTIONS (other options may be available)	<ul style="list-style-type: none"> ▪ Hydraulic surge brakes w/free backing (Check local D.O.T. laws) ▪ Gooseneck ▪ Additional tie downs ▪ Nev-R-Lube (in lieu of E-Z lube) ▪ Spare tire/rim ▪ Stake pockets/rub rail ▪ Stationary deck (wood or steel diamond plate) ▪ Toolbox lid ▪ Special color (no metallic paints) 	<ul style="list-style-type: none"> ▪ Hydraulic surge brakes w/free backing (Check local D.O.T. laws) ▪ Gooseneck ▪ Additional tie downs ▪ Nev-R-Lube (in lieu of E-Z lube) ▪ Spare tire/rim ▪ Stake pockets/rub rail ▪ Stationary deck (wood or steel diamond plate) ▪ Toolbox lid ▪ Special color (no metallic paints) 	<ul style="list-style-type: none"> ▪ Gooseneck ▪ Additional tie downs ▪ Spare tire/rim ▪ Stake pockets/rub rail ▪ Stationary deck (wood or steel diamond plate) ▪ Toolbox lid ▪ Special color (no metallic paints) ▪ Winch and cable ▪ 4,000 lb. electric winch ▪ 25,000 lb. two-speed jack 	<ul style="list-style-type: none"> ▪ Gooseneck ▪ Additional tie downs ▪ Spare tire/rim ▪ Stake pockets/rub rail ▪ Stationary deck (wood or steel diamond plate) ▪ Toolbox lid ▪ Special color (no metallic paints) ▪ Winch and cable ▪ 4,000 lb. electric winch ▪ 25,000 lb. two-speed jack