

Big TowTM

TRAILERS

MODELS:
BE-3.5, BE-5, BE-6, BE-7
DROP DECK TRAILER

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.



Standard Automatic Latching Ramps



BE-3.5, BE-5, BE-6, BE-7

866-397-8481

Fax: 320-693-7921

www.bigtowtrailers.com




Big TowTM

TRAILERS

MODELS: BE-3.5, BE-5, BE-6, BE-7

DROP DECK TRAILER

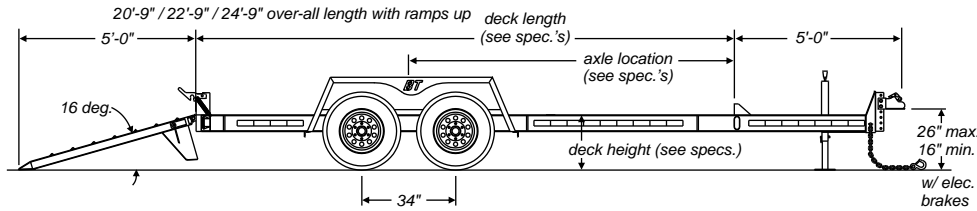

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow Trailers dealer for details.

Specifications	BE-3.5	BE-5, BE-6	BE-7
WEIGHT (lbs/kg)	2,300 or 2,450 / 1043 or 1111	BE-5: 2,500 or 2,650 or 2,800 / 1143 or 1202 or 1270 BE-6: 2,750 or 2,900 / 1257 or 1325	3,200 / 1462 or 3,350 / 1531 or 3,700 / 1691
CAPACITY (lbs/kg)	7,000 / 3175 w/adequate hitch load	BE-5: 10,000 / 4563 w/adequate hitch load BE-6: 12,000 / 5443 w/adequate hitch load	13,600 / 6169 w/adequate hitch load
DECK LENGTH (ft-in/mm)	14'-0" / 4267 or 16'-0" / 4877	14'-0" / 4267 (BE-5 only) or 16'-0" / 4877 or 18'-0" / 5486	16'-0" / 4877 or 18'-0" / 5486 or 20'-0" / 6096
DECK HEIGHT (in/mm)	19.5" / 495 empty	21.5" / 546 empty and 22.5" / 572 empty	22.5" / 572 empty
OVER-ALL WIDTH (ft-in/mm)	8'-6" / 2591	8'-6" / 2591	8'-6" / 2591
OVER-ALL LENGTH (ft-in/mm)	20'-9" / 6325 or 22'-9" / 6934	20'-9" / 6325 (BE-5) or 22'-9" / 6934 or 24'-9" / 7544	22'-9" / 6934 or 24'-9" / 7544 or 26'-9" / 8153
LOAD WIDTH (in/mm)	82" / 2083 between fenders	82" / 2083 between fenders	82" / 2083 between fenders
TONGUE LENGTH (ft-in/mm)	5'-0" / 1524	5'-0" / 1524	5'-0" / 1524
RAMPS (ft-in/mm)	5'-0" x 18.5" / 1524 x 470, 16 deg., adjustable	5'-0" x 18.5" / 1524 x 470, 16 deg., adjustable	5'-0" x 18.5" / 1524 x 470, 16 deg., adjustable, spring-assist, with auto-latch hold-ups (patented)
DECK TYPE	2" nominal white oak	2" nominal white oak	2" nominal white oak
BRAKES	Electric, w/break-away system (10"x2.25")	Electric, w/break-away system (12"x2")	Electric, w/break-away system (12"x2")
TIRES	(4) ST225/75R x 15, load range D	BE-5: (4) ST225/75R x 15, load range D BE-6: (4) 235/85R x 16, 10-ply, load range E	(4) 235/85 x 16 Bias 12-ply
WHEELS	(4) 6" x 15" white modular (6 bolt on 5.5" b.c.)	(4) 6" x 15" white modular (6 bolt on 5.5" b.c.)	(4) 6" x 16" white modular (8 bolt on 6.5" b.c.)
AXLES	(2) 3,500 lb. Torflex (5 yr warranty)	(2) 6,000 lb. Torflex (5 yr warranty)	(2) 7,000 lb. Torflex (5 yr warranty)
AXLE LOCATION (in/mm)	101" / 2565 or 115" / 2921	101" / 2565 or 115" / 2921 or 130" / 3302	115" / 2921 or 130" / 3302 or 144" / 3658
HITCH	Adj., 2" or 2-5/16" ball coupler or 3" I.D. pintle	Adj., 2-5/16" ball coupler or 3" I.D. pintle	3" I.D. pintle (4-bolt) or 2-5/16" ball coupler
TIE DOWNS	3 per side (6 total)	3 per side (6 total)	3 per side (6 total)
PARKING JACK	Single 7K drop leg, bolted on	Single 7K drop leg, bolted on	Single 10K drop leg, bolted on
SAFETY CHAINS	3/8" high tensile x 40" w/hooks and latches	3/8" high tensile x 40" w/hooks and latches	3/8" high tensile x 40" w/hooks and safety latches
TOOL BOX	Std. (Lid optional)	Std. (Lid optional)	Std. (Lid optional)
MUD FLAPS	Std.	Std.	Std.
MAIN FRAME	High tensile W6 x 12 beam, cold formed tongue	High tensile W6 x 12 beam, cold formed tongue	High tensile W6 x 12 beam, cold formed frame/tongue (W6 x 16 beam on 20 ft. deck)
HEAD BOARD	4" high channel iron	4" high channel iron	4" high channel iron
X-MEMBERS	3" channel iron	3" channel iron	3" channel iron
WIRING	Sealed modular harness	Sealed modular harness	Sealed modular harness
LIGHTING (reflectorized)	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
REG. HOLDER	Std.	Std.	Std.
FINISH (before decking)	5-stage polyurethane under/over coat	5-stage polyurethane under/over coat	5-stage polyurethane under/over coat
OPTIONS (other options may be available)	<ul style="list-style-type: none"> Hydraulic surge brakes w/free backing (Check local D.O.T. laws) E-Z Lube Hubs Toolbox Lid Spring Assist Ramps 	<ul style="list-style-type: none"> Hydraulic surge brakes w/free backing (Check local D.O.T. laws) E-Z Lube Hubs Toolbox Lid Spring Assist Ramps 	<ul style="list-style-type: none"> 235/85R x 16 Radial Tires (for 14,000 lb. capacity) E-Z Lube Hubs Toolbox Lid Additional Tie-Downs Gooseneck Spare tire/rim Stake pockets Special color (no metallic)

TOLL FREE: 866-397-8481 Fax: 320-693-7921 www.bigtowtrailers.com

1651508 -01/2007