

Big TowTM

TRAILERS

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.

MODELS:
B-5, B-6
DROP DECK TRAILER



Auto-Latch Ramps



B-5, B-6

866-397-8481

Fax: 320-693-7921


www.bigtowtrailers.com



Big TowTM

TRAILERS

MODELS:
B-5, B-6
DROP DECK TRAILER

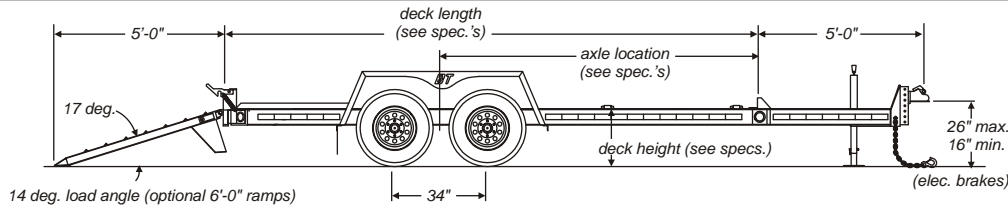

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow Trailers dealer for details.

Specifications	B-5	B-6
WEIGHT (lbs/kg)	2,450 / 1111 or 2,600 / 1179 or 2,750 / 1247 or 2,900 / 1315	2,590 / 1174 or 2,740 / 1242 or 3,040 / 1378
CAPACITY (lbs/kg)	10,000 / 4536 with adequate hitch load	12,000 / 5443 with adequate hitch load
DECK LENGTH (ft-in/mm)	14'-0" / 4267 or 16'-0" / 4877 or 18'-0" / 5486 or 20'-0" / 6096	16'-0" / 4877 or 18'-0" / 5486 or 20'-0" / 6096
DECK HEIGHT (in/mm)	21.5" / 546 unloaded	22.5" / 572 unloaded
OVER-ALL WIDTH (ft-in/mm)	8'-6" / 2591	8'-6" / 2591
LOAD WIDTH (ft-in/mm)	82" / 2083 between fenders	82" / 2083 between fenders
TONGUE LENGTH (ft-in/mm)	5'-0" (1524mm)	5'-0" (1524mm)
RAMPS	Adj., 18 1/2" wide x 5'-0" long, 17 deg. load angle (14 deg. - 6'-0")	Adj., 18 1/2" wide x 5'-0" long, 17 deg. load angle (14 deg. - 6'-0")
SPRING ASSIST	Std.	Std.
DECK TYPE	2" nominal white oak	2" nominal white oak
BRAKES	electric, with wet cell break-a-way system, both axles (12" x 2")	electric, with wet cell break-a-way system, both axles (12" x 2")
TIRES	(4) ST225/75R x 15, load range D	(4) 235/85R x 16, load range E
WHEELS	(4) 6" x 15" white modular (6 bolt on 5.5" b.c.)	(4) 6" x 16" white modular (8 bolt on 6.5" b.c.)
AXLES	(2) 6,000 lb., Torflex, with E-Z lube hubs	(2) 6,000 lb., Torflex, with E-Z lube hubs
AXLE LOCATION	8'-5" / 2565 or 9'-7" / 2921 or 10'-10" / 3302 or 12'-0" / 3658	9'-7" / 2921 or 10'-10" / 3302 or 12'-0" / 3658
HITCH	Adj. 2 5/16" ball coupler or 3" i.d. pintle ring	Adj. 2 5/16" ball coupler or 3" i.d. pintle ring
TIE DOWNS	(6) heavy-duty 3/4" forged D-rings	(6) heavy-duty 3/4" forged D-rings
PARKING JACK	Single 7K drop-leg, bolted on	Single 12K drop-leg, bolted on
SAFETY CHAINS	3/8" high tensile x 40" with safety hooks/latches	3/8" high tensile x 40" with safety hooks/latches
TOOL BOX	Std. (Lid optional)	Std. (Lid optional)
MUD FLAPS	Standard	Standard
SIDE RAILS	3 x 2 x 1/4" angle iron	3 x 2 x 1/4" angle iron
MAIN FRAME	high tensile W6 x 12 beam (one piece cold formed tongue)	high tensile W6 x 12 beam (one piece cold formed tongue)
HEAD BOARD	4" high (channel iron)	4" high (channel iron)
X-MEMBERS	High tensile 3" Jr. I-beam, 16" on center	High tensile 3" Jr. I-beam, 16" on center
WIRING	Sealed modular harness with circuit breakers	Sealed modular harness with circuit breakers
LIGHTING (reflectorized)	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
REG. HOLDER	Standard	Standard
FINISH (before decking)	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system
NOTE	Check local D.O.T. laws before ordering with hydraulic surge brakes	Check local D.O.T. laws before ordering with hydraulic surge brakes
OPTIONS (other options may be available)	<ul style="list-style-type: none"> ▪ Additional deck length ▪ Additional tie downs ▪ Beavertail option ▪ Full width ramps ▪ Hyd. Surge brakes with free backing (additional equipment may be required) ▪ Nev-R-Lube hubs ▪ Spare tire/rim ▪ Spare tire carrier 	<ul style="list-style-type: none"> ▪ Stake pockets/rub rail ▪ Tool box lid ▪ Winch and cable ▪ Pallet fork holders ▪ 12K drop-leg jack ▪ L.E.D. lighting ▪ 6' ramps ▪ Wood top ramps ▪ 245/75Rx16 tires (load range E) ▪ Special color (no metallics)
		<ul style="list-style-type: none"> ▪ Additional deck length ▪ Additional tie downs ▪ Beavertail option ▪ Full width ramps ▪ Hyd. Surge brakes with free backing (additional equipment may be required) ▪ Nev-R-Lube hubs ▪ Spare tire/rim ▪ Spare tire carrier
		<ul style="list-style-type: none"> ▪ Stake pockets/rub rail ▪ Tool box lid ▪ Winch and cable ▪ Pallet fork holders ▪ L.E.D. lighting ▪ 6' ramps ▪ Wood top ramps ▪ 245/75Rx16 tires (load range E) ▪ Special color (no metallics)

TOLL FREE: 866-397-8481 Fax: 320-693-7921 www.bigtowtrailers.com