

# Big Tow™ TRAILERS

NEW  
in '06

MODELS:  
B-5LS, B-6LS, B-7LS  
LANDSCAPE SPECIAL

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 60 ton capacity.



Patented Auto-Latch™  
Ramp Hold-ups Standard



B-5LS, B-6LS, B-7LS

866-397-8481

Fax: 320-693-7921

[www.bigtowtrailers.com](http://www.bigtowtrailers.com)




# Big Tow<sup>TM</sup>

## TRAILERS

# MODELS: B-5LS, B-6LS, B-7LS

## LANDSCAPE SPECIAL

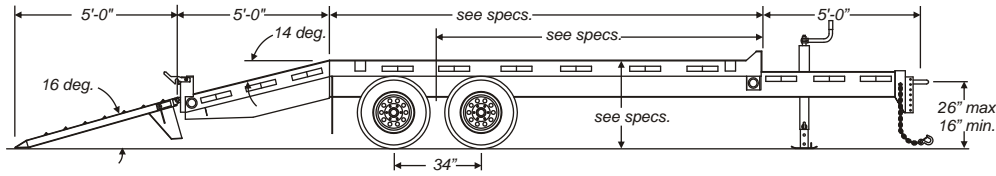

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for more information.

Specifications	B-5LS "Landscape Special"	B-6LS "Landscape Special"	B-7LS "Landscape Special"
<b>WEIGHT (lbs/kg)</b>	3,600 / 1633 or 3,800 / 1724	3,700 / 1679 or 3,900 / 1769	4,000 / 1814 or 4,300 / 1950
<b>CAPACITY (lbs/kg)</b>	10,000 / 4536 with adequate hitch load	12,000 / 5443 with adequate hitch load	13,600 / 6169 with adequate hitch load
<b>DECK LENGTH (ft-in/mm)</b>	14'-0" / 4267 or 16'-0" / 4877 with 5'-0" wood topped b.t. @ 14 deg.	14'-0" / 4267 or 16'-0" / 4877 with 5'-0" wood topped b.t. @ 14 deg.	16'-0" / 4877 or 18'-0" / 5486 with 5'-0" wood topped b.t. @ 14 deg.
<b>DECK HEIGHT (ft-in/mm)</b>	32.5" / 826 loaded	33.5" / 851 loaded	35.5" / 902 loaded
<b>OVER-ALL WIDTH (ft-in/mm)</b>	99.38" / 2524	99.38" / 2524	99.38" / 2524
<b>TONGUE LENGTH (ft-in/mm)</b>	5'-0" / 1524	5'-2" / 1524	5'-2" / 1524
<b>RAMPS (ft-in/mm)</b>	Adj. 5'-0" long, cleat style with Auto-Latch hold-ups (patented)	Adj. 5'-0" long, cleat style with Auto-Latch hold-ups (patented)	Adj. 5'-0" long, cleat style with Auto-Latch hold-ups (patented) w/spring assist
<b>DECK TYPE</b>	2" nominal white oak (flush deck), wood topped beavertail	2" nominal white oak (flush deck), wood topped beavertail	2" nominal white oak (flush deck), wood topped beavertail
<b>BRAKES</b>	Electric, with break-away, 12"x 2"	Electric, with break-away, 12"x 2"	Electric, with break-away, 12"x 2"
<b>TIRES</b>	(4) ST225/75R x 15, load range D	(4) 245/75R x 16, load range E	(4) 235/85 x 16, bias 12-ply
<b>WHEELS</b>	(4) 6" x 15" white modular, 6-bolt on 5.5" b.c.	(4) 6" x 16" white modular, 6-bolt on 5.5" b.c.	(4) 6" x 16" white modular, 8-bolt on 6.5" b.c.
<b>AXLES</b>	(2) 6,000 lb. Torflex	(2) 6,000 lb. Torflex	(2) 7,000 lb. Torflex
<b>AXLE LOCATION</b>	10'-6" / 3200 or 12'-0" / 3658	10'-6" / 3200 or 12'-0" / 3658	12'-0" / 3658 or 13'-6" / 4115
<b>HITCH</b>	Adj. 2-5/16" ball coupler or 3" I.D. pintle ring	Adj. 2-5/16" ball coupler or 3" I.D. pintle ring	Adj. 2-5/16" ball coupler or 3" I.D. pintle ring
<b>TIE DOWNS</b>	(8) stake pockets, 4/side	(8) stake pockets, 4/side	(8) stake pockets, 4/side
<b>PARKING JACK</b>	Single 12K drop-leg (bolted on)	Single 12K drop-leg (bolted on)	Single 12K drop-leg (bolted on)
<b>SAFETY CHAINS</b>	3/8" high tensile x 40" with safety latch hooks	3/8" high tensile x 40" with safety latch hooks	3/8" high tensile x 40" with safety latch hooks
<b>TOOL BOX</b>	Standard, (Lid optional)	Standard, (Lid optional)	Standard, (Lid optional)
<b>MUD FLAPS</b>	Standard	Standard	Standard
<b>SIDE RAILS</b>	6" channel iron	6" channel iron	6" channel iron
<b>MAIN FRAME</b>	W10 x 12 beam, one piece cold-formed tongue/frame	W10 x 12 beam, one piece cold-formed tongue/frame	W10 x 12 beam, one piece cold-formed tongue/frame
<b>HEAD BOARD</b>	8" channel iron	8" channel iron	8" channel iron
<b>X-MEMBERS</b>	3" channel iron	3" channel iron	3" channel iron
<b>WIRING</b>	Sealed modular harness	Sealed modular harness	Sealed modular harness
<b>LIGHTING (reflectorized)</b>	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
<b>REG. HOLDER</b>	Standard	Standard	Standard
<b>FINISH (before decking)</b>	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system
	<ul style="list-style-type: none"> <li>▪ Additional tie downs</li> <li>▪ Full width ramps</li> <li>▪ Gooseneck</li> <li>▪ Spare tire/rim</li> <li>▪ Special color (no metallic paints)</li> <li>▪ Rub rail</li> <li>▪ Tool box lid</li> </ul>	<ul style="list-style-type: none"> <li>▪ Additional tie downs</li> <li>▪ Full width ramps</li> <li>▪ Gooseneck</li> <li>▪ Spare tire/rim</li> <li>▪ Special color (no metallic paints)</li> <li>▪ Rub rail</li> <li>▪ Tool box lid</li> </ul>	<ul style="list-style-type: none"> <li>▪ 235/85R x 16 Radial Tire (for 14,000 lb. capacity)</li> <li>▪ Additional tie downs</li> <li>▪ Full width ramps</li> <li>▪ Gooseneck</li> <li>▪ Spare tire/rim</li> <li>▪ Special color (no metallic paints)</li> <li>▪ Rub rail</li> <li>▪ Tool box lid</li> </ul>

TOLL FREE: 866-397-8481 Fax: 320-693-7921 [www.bigtowtrailers.com](http://www.bigtowtrailers.com)

165-1512:8/2005