

Big TowTM

TRAILERS

MODELS:
B-7, B-8
DROP DECK

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.



Spring-assist ramps



B-7, B-8

866-397-8481

Fax: 320-693-7921


www.bigtowtrailers.com



Big TowTM

TRAILERS

MODELS:
B-7, B-8
DROP DECK

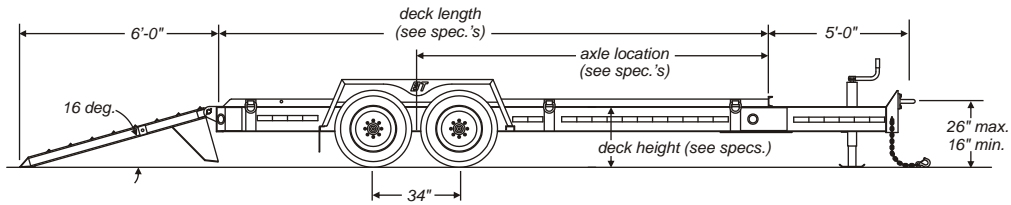

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for more information.

Specifications	B-7	B-8
WEIGHT (lbs/kg)	3,700 / 1678 or 3,900 / 1769 or 4,100 / 1860	4,100 / 1860
CAPACITY (lbs/kg)	14,000 / 6350 with adequate hitch load	16,000 / 7258 with adequate hitch load
DECK LENGTH (ft-in/mm)	16'-0" / 4877 or 18'-0" / 5486 or 20'-0" / 6096	20'-0" / 6096
DECK HEIGHT (in/mm)	21" / 533 loaded	22.5" / 572 loaded
OVER-ALL WIDTH (ft-in/mm)	8'-6" / 2591	8'-6" / 2591
LOAD WIDTH (ft-in/mm)	84" / 2134 between fenders	82" / 2083 between fenders
TONGUE LENGTH (ft-in/mm)	5'-0" (1524mm)	5'-0" (1524mm)
RAMPS	Adj., 19 1/4" wide x 6'-0" long, spring assist, 16 deg. load angle	Adj., 19 1/4" wide x 6'-0" long, spring assist, 16 deg. load angle
DECK TYPE	2" nominal white oak	2" nominal white oak
BRAKES	electric, with wet cell break-a-way system, both axles (12-1/4" x 2-1/2")	electric, with wet cell break-a-way system, both axles (12-1/4" x 3-3/8")
TIRES	(4) 215/75R x 17.5, 16 ply, load range H	(4) 215/75R x 17.5, 16 ply, load range H
WHEELS	(4) 6.75" x 17.5", 8 bolt	(4) 6.75" x 17.5", 8 bolt
AXLES	(2) 7,200 lb., Torflex, with E-Z lube hubs	(2) 8,000 lb., Torflex, with E-Z lube hubs
AXLE LOCATION (in/mm)	115" / 2926 or 130" / 3292 or 144" / 3658	144" / 3658
HITCH	Adj. 3" i.d. pintle ring	Adj. 3" i.d. pintle ring
TIE DOWNS	(6) heavy-duty 3/4" forged D-rings	(6) heavy-duty 3/4" forged D-rings
PARKING JACK	Single 12K drop-leg, bolted on	Single 12K drop-leg, bolted on
SAFETY CHAINS	3/8" high tensile x 40" with safety hooks/latches	3/8" high tensile x 40" with safety hooks/latches
TOOL BOX	Std. (Lid optional)	Std. (Lid optional)
MUD FLAPS	Standard	Standard
SIDE RAILS	5 x 3 x 1/4" angle iron	3 x 2 x 1/4" angle iron
MAIN FRAME	high tensile W10 x 12 beam (one piece cold formed tongue)	high tensile W10 x 17 beam (one piece cold formed tongue)
HEAD BOARD	4" high (channel iron)	4" high (channel iron)
X-MEMBERS	High tensile 3" Jr. I-beam, 16" on center	High tensile 3" Jr. I-beam, 16" on center
WIRING	Sealed modular harness with circuit breakers	Sealed modular harness with circuit breakers
LIGHTING (reflectorized)	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
REG. HOLDER	Standard	Standard
FINISH (before decking)	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system
OPTIONS (other options may be available)	<ul style="list-style-type: none"> ▪ Additional tie downs ▪ Beavertail (3'-0" @ 10 degree) ▪ Full width ramps ▪ Gooseneck ▪ Spare tire/rim ▪ Spare tire carrier ▪ Pallet fork holders ▪ Special color (no metallic paints) ▪ Stake pockets/rub rail ▪ Tool box lid ▪ Winch and cable 	<ul style="list-style-type: none"> ▪ 25,000 lb., two speed jack ▪ L.E.D. lighting ▪ Wood top ramps ▪ 2-5/16" ball coupler
		<ul style="list-style-type: none"> ▪ Additional tie downs ▪ Beavertail (3'-0" @ 10 degree) ▪ Full width ramps ▪ Gooseneck ▪ Spare tire/rim ▪ Spare tire carrier ▪ Pallet fork holders ▪ Special color (no metallic paints) ▪ Stake pockets/rub rail ▪ Tool box lid ▪ Winch and cable

TOLL FREE: 866-397-8481 Fax: 320-693-7921 www.bigtowtrailers.com

1651516-10/2004