

# Big Tow<sup>TM</sup>

## TRAILERS

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.

MODELS:  
B-9, B-10, B12  
DECK OVER TRAILER



Two-way spring assist



Hutchens Suspension (shown) available on B-10 and B-12 only

B-9, B-10, B-12

866-397-8481

Fax: 320-693-7921

[www.bigtowtrailers.com](http://www.bigtowtrailers.com)




# Big Tow<sup>TM</sup>

## TRAILERS

### MODELS: B-9, B-10, B-12 DECK OVER TRAILER

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow Trailers dealer for details.

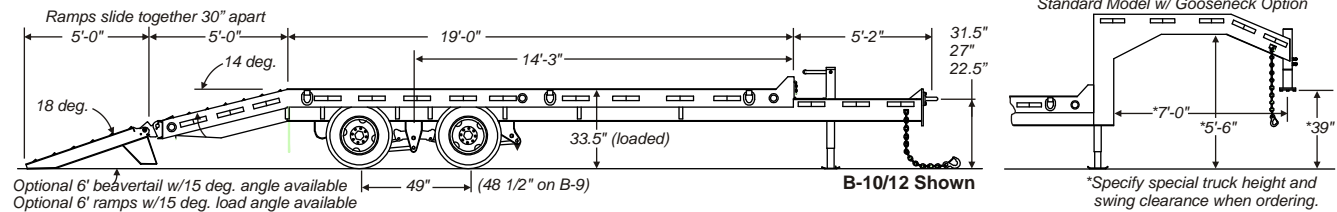

Specifications	B-9	B-10	B-12
<b>WEIGHT (lbs/kg)</b>	5,880 / 2667	5,900 / 2676	7,240 / 3284
<b>CAPACITY (lbs/kg)</b>	18,000 / 8165 w/adequate hitch load	20,000 / 9072 w/adequate hitch load	24,000 / 10,886 w/adequate hitch load
<b>DECK LENGTH (ft-in/mm)</b>	19' / 5791 w/ 5'-0" / 1524 beavertail @14 deg.	19' / 5791 w/ 5'-0" / 1524 beavertail @14 deg.	19' / 5791 w/ 5'-0" / 1524 beavertail @14 deg.
<b>DECK HEIGHT (in/mm)</b>	33.5" / 851 loaded	33.5" / 851 loaded	33.5" / 851 loaded
<b>OVER-ALL WIDTH (ft-in/mm)</b>	8'-6" / 2591	8'-6" / 2591	8'-6" / 2591
<b>TONGUE LENGTH (ft-in/mm)</b>	5'-2" / 1575	5'-2" / 1575	5'-2" / 1575
<b>RAMP</b>	Adj. 21" x 5'-0" long, two-way spring assist	Adj. 21" x 5'-0" long, two-way spring assist	Adj. 21" x 5'-0" long, two-way spring assist
<b>DECK TYPE</b>	2" nominal white oak, flush deck	2" nominal white oak, flush deck	2" nominal white oak, flush deck
<b>BRAKES</b>	Electric, w/wet-cell break-away (12.25 x 3.38")	Electric, w/wet-cell break-away (12.25 x 4")	Electric, w/wet-cell break-away (12.25 x 5")
<b>TIRES</b>	(8) 235/85R x 16, 10 ply, load range E	(8) 235/85R x 16, 10 ply, load range E	(8) 235/85 x 16 Bias 12 ply
<b>WHEELS</b>	(8) 6" x 16", budd type, 8 bolt	(8) 6" x 16", budd type, 8 bolt	(8) 6" x 16", budd type, 8 bolt
<b>AXLES</b>	(2) 9,000 lb. with oil bath bearings	(2) 10,000 lb., heavy-duty, oil bath bearings	(2) 12,000 lb., heavy-duty, oil bath bearings
<b>SUSPENSION</b>	Slipper spring	9700 Hutchens, adjustable	9700 Hutchens, adjustable
<b>HITCH</b>	Adj. heavy-duty 3" I.D. pintle ring	Adj. heavy-duty 3" I.D. pintle ring	Adj. heavy-duty 3" I.D. pintle ring
<b>TIE DOWNS</b>	(6) heavy-duty 1" forged D-rings	(6) heavy-duty 1" forged D-rings	(6) heavy-duty 1" forged D-rings
<b>PARKING JACK</b>	Single 12K drop-leg, bolt-on	Single 12K drop-leg, bolt-on	Single 12K drop-leg, bolt-on
<b>SAFETY CHAINS</b>	3/8" high tensile x 40" w/hooks and latches	3/8" high tensile x 40" w/hooks and latches	1/2" high tensile x 40" w/hooks and latches
<b>TOOL BOX</b>	Std. (lockable)	Std. (lockable)	Std. (lockable)
<b>MUD FLAPS</b>	Std.	Std.	Std.
<b>SIDE RAILS</b>	8 channel iron	8 channel iron	8 channel iron
<b>MAIN FRAME</b>	W10 x 17, gr. 50, one piece cold formed tongue	W10 x 17, gr. 50, one piece cold formed tongue	W10 x 17, gr. 50, one piece cold formed tongue
<b>HEAD BOARD</b>	5.5" high channel iron	5.5" high channel iron	5.5" high channel iron
<b>X-MEMBERS</b>	High tensile 3" jr. I-beam, 16" o.c.	High tensile 3" jr. I-beam, 16" o.c.	High tensile 3" jr. I-beam, 16" o.c.
<b>WIRING</b>	Sealed modular harness	Sealed modular harness	Sealed modular harness
<b>LIGHTING (reflectorized)</b>	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
<b>REG. HOLDER</b>	Std.	Std.	Std.
<b>FINISH (before decking)</b>	5-stage polyurethane under/over coat	5-stage polyurethane under/over coat	5-stage polyurethane under/over coat
<b>NOTE</b>	Subject to Federal Excise Tax		
<b>OPTIONS (other options may be available)</b>	<ul style="list-style-type: none"> <li>Additional deck length</li> <li>Additional tie-downs</li> <li>Double-break beavertail</li> <li>Dual parking jacks</li> <li>Gooseneck</li> <li>Spare tire/rim</li> <li>Special color (no metallic)</li> <li>Stake pocket/rub rail</li> <li>Winch and cable</li> <li>6'-0" ramps</li> <li>6'-0" beavertail</li> <li>8'-0" overall width</li> <li>25,000 lb. two-speed jack</li> </ul>	<ul style="list-style-type: none"> <li>Additional deck length</li> <li>Additional tie-downs</li> <li>Double-break beavertail</li> <li>Dual parking jacks</li> <li>Full air brakes w/ ABS &amp; park brake</li> <li>Gooseneck</li> <li>Spare tire/rim</li> <li>Special color (no metallic)</li> <li>Stake pocket/rub rail</li> <li>Winch and cable</li> <li>6'-0" ramps</li> <li>6'-0" beavertail</li> <li>8'-0" overall width</li> <li>25,000 lb. two-speed jack</li> </ul>	<ul style="list-style-type: none"> <li>Additional deck length</li> <li>Additional tie-downs</li> <li>Double-break beavertail</li> <li>Dual parking jacks</li> <li>Full air brakes w/ ABS &amp; park brake</li> <li>Gooseneck</li> <li>Spare tire/rim</li> <li>Special color (no metallic)</li> <li>Stake pocket/rub rail</li> <li>Winch and cable</li> <li>6'-0" ramps</li> <li>6'-0" beavertail</li> <li>8'-0" overall width</li> <li>25,000 lb. two-speed jack</li> <li>Radial Tires</li> </ul>

TOLL FREE: 866-397-8481 Fax: 320-693-7921 [www.bigtowtrailers.com](http://www.bigtowtrailers.com)