

Big TowTM

TRAILERS

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.

MODELS:
B-15, B-20
DECK OVER TRAILER



Two-way spring assist

Optional double-break beavertail



B-20 Shown

B-15, B-20

866-397-8481


Fax: 320-693-7921

www.bigtowtrailers.com



Big Tow™ TRAILERS

MODELS:
B-15, B-20
DECK OVER TRAILER

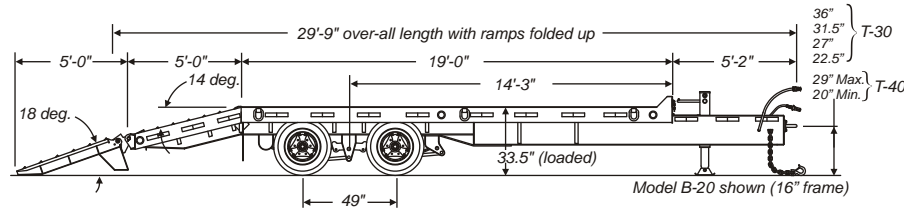

Optional 6' beavertail w/8 deg. angle available
Optional 6' ramps w/15 deg. load angle available

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for more information.

Specifications	B-15	B-20
WEIGHT (lbs/kg)	8,450 / 3833	8,500 / 3856
CAPACITY (lbs/kg)	30,000 / 13,608 with adequate hitch load	40,000 / 18,144 with adequate hitch load
DECK LENGTH (ft-in/mm)	19'-0" / 5791 with 5'-0" / 1524 beavertail @ 14 deg.	19'-0" / 5791 with 5'-0" / 1524 beavertail @ 14 deg.
DECK HEIGHT (in/mm)	33.5" / 851 loaded	33.5" / 851 loaded
OVER-ALL WIDTH (ft-in/mm)	8'-6" / 2591	8'-6" / 2591
OVER-ALL LENGTH (ft-in/mm)	29'-9" / 9068 with ramps in travel position	29'-9" / 9068 with ramps in travel position
TONGUE LENGTH (ft-in/mm)	5'-2" (1575mm)	5'-2" (1575mm)
RAMPS	Adj., 21" x 5'-0" lg., 18-deg. Load angle, 2-way spring assist	Adj., 21" x 5'-0" lg., 18-deg. Load angle, 2-way spring assist
DECK TYPE	2" nominal white oak (flush deck), angle iron beavertail	2" nominal white oak (flush deck), angle iron beavertail
BRAKES	Electric w/ wet-cell break-away system (12.25" x 5")	Full air, 12.25 x 7.5 both axles (w/ABS on front axle - park brake on all)
TIRES	(8) 215/75R x 17.5, 16-ply, load range H	(8) 215/75R x 17.5, 16-ply, load range H
WHEELS	(8) 6.75 x 17.5 (budd type)	(8) 6.75 x 17.5 cast spoke
AXLES	(2) 15,000 lb. w/oil bath bearings	(2) 22,500 lb. w/oil bath bearings
SUSPENSION	9700 Hutchens, adjustable	9700 Hutchens, adjustable
AUTO. SLACK ADJ.	N/A	Standard
HITCH	Adjustable, heavy-duty 3" I.D. pintle ring	Adjustable, heavy-duty 3" I.D. pintle ring
TIE DOWNS	(6) heavy-duty 1" forged D-rings	(6) heavy-duty 1" forged D-rings
PARKING JACK	(1) 25,000 lb., two-speed (bolted on)	(1) 25,000 lb., two-speed (bolted on)
SAFETY CHAINS	1/2" high tensile x 40" with safety latch hooks	1/2" high tensile x 40" with safety latch hooks
TOOL BOX	Standard, lockable	Standard, lockable
MUD FLAPS	Standard	Standard
SIDE RAILS	8" channel iron	8" channel iron
MAIN FRAME	W10 x 26, grade 50, cold-formed tongue	W16 x 26, grade 50, cold-formed tongue
HEAD BOARD	5-1/2" high, channel iron	5-1/2" high, channel iron
X-MEMBERS	High tensile 3" Jr. I-beam, 16" on center	High tensile 3" Jr. I-beam, 16" on center
WIRING	Sealed modular harness with circuit breakers	Sealed modular harness with circuit breakers
LIGHTING (reflectorized)	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
REG. HOLDER	Standard	Standard
FINISH (before decking)	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system
NOTE	Subject to Federal Excise Tax	Subject to Federal Excise Tax
OPTIONS (other options may be available)	<ul style="list-style-type: none"> ▪ Additional deck length ▪ Additional tie downs ▪ Dual parking jacks ▪ Outriggers ▪ Recessed deck ▪ Spare tire/rim 	<ul style="list-style-type: none"> ▪ Special color (no metallic paints) ▪ Stake pockets/rub rail ▪ Tubular side rails ▪ Winch and cable ▪ 6'-0" ramps ▪ 6'-0" beavertail ▪ 8'-0" over-all width
		<ul style="list-style-type: none"> ▪ ABS brakes on both axles ▪ Additional deck length ▪ Additional tie downs ▪ Aluminum extension ramps ▪ Budd wheels ▪ Double-break beavertail ▪ Dual parking jacks ▪ Outriggers ▪ Recessed deck ▪ Spare tire/rim ▪ Special color (no metallic paints) ▪ Stake pockets/rub rail ▪ Winch and cable ▪ 6'-0" ramps w/6'-0" beavertail ▪ 8'-0" over-all width

TOLL FREE: 866-397-8481 Fax: 320-693-7921 www.bigtowtrailers.com