

Big TowTM

TRAILERS

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.

MODEL:
B-25
DECK OVER TRAILER



B-25

866-397-8481

Fax: 320-693-7921


www.bigtowtrailers.com



Big TowTM

TRAILERS

MODEL:
B-25
DECK OVER TRAILER

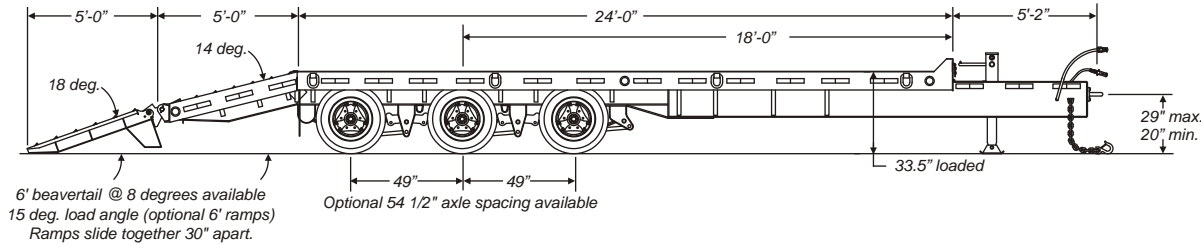

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for details.

Specifications

B-25

WEIGHT (lbs/kg)	11,100 / 5035	
CAPACITY (lbs/kg)	50,000 / 22,680 with adequate hitch load	
DECK LENGTH (ft-in/mm)	24'-0" / 7315 with 5'-0" / 1524 angle iron beavertail @ 14 degrees	
DECK HEIGHT (in/mm)	33.5" / 851 loaded	
OVER-ALL WIDTH (ft-in/mm)	8'-6" / 2591	
TONGUE LENGTH (ft-in/mm)	5'-2" / 1575	
RAMPS	Adj. 21" x 5'-0" lg., 18 degree load angle, 2-way spring assist	
DECK TYPE	2" nominal white oak wood, flush	
BRAKES	Air, 12 1/4" x 7 1/2" w/ ABS (2s/2m) & park brake on all axles	
TIRES	(12) 215/75R x 17.5, 16 ply, load range H	
WHEELS	(12) 6.75 x 17.5, cast spoke (budd optional)	
AXLES	(3) 22,500 lb. w/oil bath bearings	
SUSPENSION	9700 Hutchens, adjustable	
AUTO. SLACK ADJ.	Standard	
HITCH	Adjustable, heavy duty 3" i.d. pintle ring	
TIE DOWNS	(8) heavy duty 1" forged D-rings (4 per side)	
PARKING JACK	(1) 25,000 lb., two speed (bolted on)	
SAFETY CHAINS	5/8" (16mm) gr. 80 x 40" (1016mm) with safety hooks/latches	
TOOL BOX	Std., lockable	
MUD FLAPS	Std.	
SIDE RAILS	8 channel iron	
MAIN FRAME	W16 x 26, gr. 50, cold formed frame/tongue	
HEAD BOARD	5.5" high, channel iron	
X-MEMBERS	High-tensile 3" jr. I-beam, 16" / 406 o.c. with gussets	
WIRING	Sealed modular harness with circuit breakers	
LIGHTING (reflectorized)	Sealed beam, flush/shock mounted	
REG. HOLDER	Std.	
FINISH (before decking)	5-stage polyurethane under and overcoat system	
NOTE:	Trailer is subject to Federal Excise Tax	
OPTIONS (other options may be available)	<ul style="list-style-type: none"> ▪ ABS brakes on 2 axles (4s/2m) or 3 axles (6s/3m) ▪ Additional deck length ▪ Additional tie downs ▪ Budd wheels ▪ Double-break beavertail (7'-6" w/ 6'-0" ramps) ▪ Dual parking jacks ▪ Outriggers 	<ul style="list-style-type: none"> ▪ Spare tire/rim ▪ Special color ▪ Stake pockets with rub rail ▪ Winch and cable ▪ 6'-0" ramps with 6'-0" beavertail ▪ 8'-0" (2438mm) over-all width ▪ 54 1/2" axle spacing ▪ Front Air Lift Axle

TOLL FREE: 866-397-8481 Fax: 320-693-7921 www.bigtowtrailers.com

16511530 - 4/2006