

# Big Tow<sup>TM</sup>

## TRAILERS

MODELS:  
B-25RG, B-35RG  
RIGID GOOSENECK TRAILER

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.



Optional third axle  
on B-35RG

Optional aluminum ramps  
for top deck loading



B-25RG, B-35RG

866-397-8481

Fax: 320-693-7921


[www.bigtowtrailers.com](http://www.bigtowtrailers.com)



# Big Tow<sup>TM</sup>

## TRAILERS

MODELS:  
B-25RG, B-35RG  
RIGID GOOSENECK TRAILER

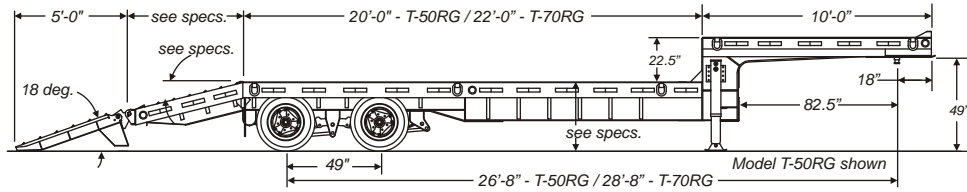

Optional 6' ramps w/15 deg. load angle available

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for details.

Specifications	B-25RG	B-35RG		
<b>WEIGHT (lbs/kg)</b>	11,500 / 5216			
<b>CAPACITY (lbs/kg)</b>	50,000 / 22,680 with adequate hitch load	70,000 / 31,752 with adequate hitch load		
<b>DECK LENGTH (ft-in/mm)</b>	20'-0" / 6096 deck, 10'-0" / 3048 top, 5'-0" / 1524 beavertail @ 14 deg.	22'-0" / 6706 deck, 10'-0" / 3048 top, 4'-0" / 1219 beavertail @ 16 deg.		
<b>DECK HEIGHT (in/mm)</b>	33.5" / 851 loaded	36.5" / 927 unloaded		
<b>OVER-ALL WIDTH (ft-in/mm)</b>	8'-6" / 2591	8'-6" / 2591		
<b>SWING CLEARANCE (in/mm)</b>	82.5" / 2096 – Please specify if other than standard	82.5" / 2096 – Please specify if other than standard		
<b>TRUCK HEIGHT (in/mm)</b>	49" (1245mm)	49" (1245mm)		
<b>RAMPS</b>	Adj., 21" x 5'-0" lg., 18-deg. Load angle, 2-way spring assist	Adj., 21" x 5'-0" lg., 18-deg. Load angle, 2-way spring assist		
<b>DECK TYPE</b>	2" nominal white oak (flush deck), angle iron beavertail	Full 2" white oak (flush deck), angle iron beavertail		
<b>BRAKES</b>	Full air, 12.25 x 7.5 both axles (w/ABS on front axle – park brake on all)	Full air, 12.25 x 7.5 all axles (w/ABS on front axle – park brake on all)		
<b>TIRES</b>	(8) 215/75R x 17.5, 16-ply, load range H	(8) 235/75R x 17.5, 16-ply, load range H		
<b>WHEELS</b>	(8) 6.75 x 17.5 cast spoke	(8) 6.75 x 17.5 cast spoke		
<b>AXLES</b>	(2) 22,500 lb. w/oil bath bearings	(2) 25,000 lb. w/oil bath bearings		
<b>SUSPENSION</b>	9700 Hutchens, adjustable	9700 Hutchens, adjustable		
<b>AUTO. SLACK ADJ.</b>	Standard	Standard		
<b>HITCH</b>	King pin	King pin		
<b>TIE DOWNS</b>	(10) heavy-duty 1" forged D-rings	(10) heavy-duty 1" forged D-rings		
<b>PARKING JACK</b>	(2) 25,000 lb., two-speed (bolted on)	(2) 25,000 lb., two-speed (bolted on)		
<b>TOOL BOX</b>	Optional	Optional		
<b>MUD FLAPS</b>	Standard	Standard		
<b>SIDE RAILS</b>	8" channel iron (main deck), 6" channel iron (top deck)	10" channel iron (main deck)		
<b>MAIN FRAME</b>	W16 x 26, grade 50	W16 x 50		
<b>X-MEMBERS</b>	High tensile 3" Jr. I-beam, 16" on center w/gussets	W6 x 9 beam, 16" on center		
<b>WIRING</b>	Sealed modular harness with circuit breakers	Sealed modular harness with circuit breakers		
<b>LIGHTING (reflectORIZED)</b>	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted		
<b>REG. HOLDER</b>	Standard	Standard		
<b>FINISH (before decking)</b>	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system		
<b>NOTE</b>	Subject to Federal Excise Tax	Subject to Federal Excise Tax		
<b>OPTIONS (other options may be available)</b>	<ul style="list-style-type: none"> <li>▪ ABS brakes on both axles</li> <li>▪ Additional deck length</li> <li>▪ Additional tie downs</li> <li>▪ Budd wheels (shown on front)</li> <li>▪ Double break beavertail (7'-6") w/ 6' ramps</li> <li>▪ Out-riggers</li> <li>▪ Aluminum ramps to load top deck (14 deg. incline)</li> </ul>	<ul style="list-style-type: none"> <li>▪ Spare tire/rim</li> <li>▪ Special color (no metallic paints)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Tool box</li> <li>▪ Winch and cable</li> <li>▪ 6'-0" beavertail / 6'-0" ramps</li> <li>▪ 8'-0" over-all width</li> </ul>	<ul style="list-style-type: none"> <li>▪ ABS brakes on both axles</li> <li>▪ Additional deck length</li> <li>▪ Additional tie downs</li> <li>▪ Bolsters (open wheels 34 1/2" deck height)</li> <li>▪ Budd wheels</li> <li>▪ Out riggers</li> <li>▪ 70" aluminum ramps to load gooseneck (20 deg. incline)</li> <li>▪ Spare tire/rim</li> </ul>	<ul style="list-style-type: none"> <li>▪ Special color (no metallic paints)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Tool box</li> <li>▪ Triple axle</li> <li>▪ Winch and cable</li> <li>▪ 30 degree neck (adds 40" to deck length)</li> <li>▪ 8'-0" over-all width</li> </ul>
		*Note: 5' and 6' beavertails are not available on the T-70RG		

TOLL FREE: 866-397-8481 Fax: 320-693-7921 [www.bigtowtrailers.com](http://www.bigtowtrailers.com)

1651535 - 4/2006