

# Big Tow<sup>TM</sup>

## TRAILERS

Offering a full line of the highest quality construction, utility and industrial trailers on the market- 1 ton to 55 ton capacity.

MODELS:  
**BE-5BL, BE-6BL**  
BEAVERTAIL with LIP



5 in. Safety Lip

3 ft. Beavertail

Auto-Latch Ramps are now standard!



BE-5BL, BE-6BL

**866-397-8481**

Fax: 320-693-7921

[www.bigtowtrailers.com](http://www.bigtowtrailers.com)




# Big Tow<sup>TM</sup>

## TRAILERS

### MODELS:

# BE-5BL, BE-6BL

## BEAVERTAIL with LIP

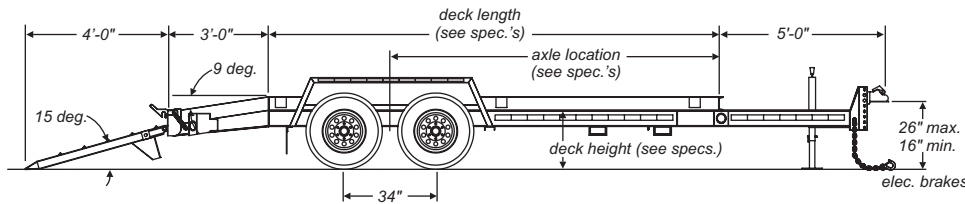

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow Trailers dealer for details.

Specifications	BE-5BL	BE-6BL
<b>WEIGHT (lbs/kg)</b>	3,260 or 3,460 / 1479 or 1569	3,360 or 3,560 / 1524 or 1615
<b>CAPACITY (lbs/kg)</b>	10,000 / 4536 with adequate hitch load	12,000 / 5443 with adequate hitch load
<b>DECK LENGTH (ft-in/mm)</b>	14'-0" or 16'-0" / 4267 or 4877 with 3'-0" beavertail @ 9 deg.	14'-0" or 16'-0" / 4267 or 4877 with 3'-0" beavertail @ 9 deg.
<b>DECK HEIGHT (ft-in/mm)</b>	21.5" / 546 empty	22.5" / 572 unloaded
<b>OVER-ALL WIDTH (ft-in/mm)</b>	8'-6" / 2591	8'-6" / 2591
<b>LOAD WIDTH (in/mm)</b>	82" / 2083 between fenders	82" / 2083 between fenders
<b>TONGUE LENGTH (ft-in/mm)</b>	5'-0" / 1524	5'-0" / 1524
<b>RAMPS (ft-in/mm)</b>	Auto-Latch <sup>TM</sup> , adj., 4'-0" / 1219 long., 15-deg. cleat style	Auto-Latch <sup>TM</sup> , adj., 4'-0" / 1219 long., 15-deg. cleat style
<b>DECK TYPE</b>	2" nominal white oak screwed down (flush deck)	2" nominal white oak screwed down (flush deck)
<b>BRAKES</b>	Electric, with break-away, 12"x2"	Electric, with break-away, 12"x2"
<b>TIRES</b>	(4) ST225/75R x 15, load range D	(4) 235/85R x 16, load range E
<b>WHEELS</b>	(4) 6" x 15" white modular, 6-bolt on 5.5" b.c.	(4) 6" x 16" white modular, 6-bolt on 5.5" b.c.
<b>AXLES</b>	(2) 6,000 lb. Torflex	(2) 6,000 lb. Torflex
<b>AXLE LOCATION</b>	11'-8" or 13'-2" from front of deck to center of axles	11'-8" or 13'-2" from front of deck to center of axles
<b>HITCH</b>	Adjustable, 2-5/16" ball coupler or 3" I.D. pintle ring	Adjustable, 2-5/16" ball coupler or 3" I.D. pintle ring
<b>TIE DOWNS</b>	(6) stake pockets (3 per side)	(6) stake pockets (3 per side)
<b>PARKING JACK</b>	Single 7K drop-leg (bolted on)	Single 7K drop-leg (bolted on)
<b>SAFETY CHAINS</b>	(2) 3/8" high tensile x 40" with safety latch hooks	(2) 3/8" high tensile x 40" with safety latch hooks
<b>TOOL BOX</b>	Standard, (Lid optional)	Standard, (Lid optional)
<b>MUD FLAPS</b>	Standard	Standard
<b>SIDE RAILS</b>	5" high	5" high
<b>MAIN FRAME</b>	High tensile W6 x 12 beam (one piece cold-formed tongue/frame)	High tensile W6 x 12 beam (one piece cold-formed tongue/frame)
<b>HEAD BOARD</b>	5" high, channel iron	5" high, channel iron
<b>X-MEMBERS</b>	3" channel iron	3" channel iron
<b>WIRING</b>	Sealed modular harness	Sealed modular harness
<b>LIGHTING (reflectorized)</b>	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
<b>REG. HOLDER</b>	Standard	Standard
<b>FINISH (before decking)</b>	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system
	<ul style="list-style-type: none"> <li>▪ Hydraulic surge brakes w/freebacking (check D.O.T. laws)</li> <li>▪ EZ Lube hubs</li> <li>▪ Spring assist ramps</li> <li>▪ Lockable tool box lid</li> <li>▪ Fork holders</li> </ul>	<ul style="list-style-type: none"> <li>▪ Hydraulic surge brakes w/freebacking (check D.O.T. laws)</li> <li>▪ EZ Lube hubs</li> <li>▪ Spring assist ramps</li> <li>▪ Lockable tool box lid</li> <li>▪ Fork holders</li> </ul>