

# Big Tow<sup>TM</sup>

## TRAILERS

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.

MODELS:  
B-10LP, B-12LP  
LOW PROFILE TRAILER



Two-way spring assist ramps



B-10LP, B-12LP

866-397-8481

Fax: 320-693-7921



[www.bigtowtrailers.com](http://www.bigtowtrailers.com)



# Big Tow<sup>TM</sup>

## TRAILERS

### MODELS: B-10LP, B-12LP LOW PROFILE TRAILER

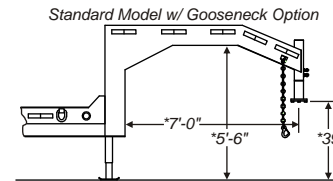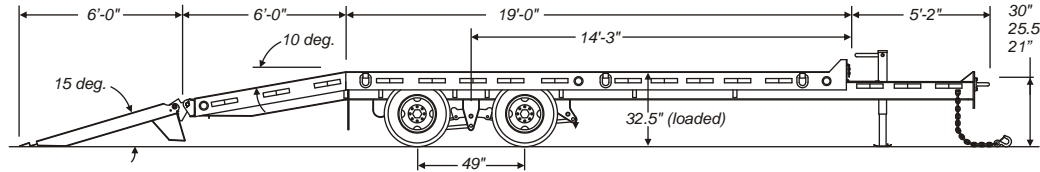

Standard Model w/ Gooseneck Option  
\*Specify special truck height and swing clearance when ordering.

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for more details.

| Specifications                                  | B-10LP "Low Profile"  | B-12LP "Low Profile"  |
|---|---|---|
| <b>WEIGHT (lbs/kg)</b>                          | 5,900 / 2676  | 7,240 / 3284  |
| <b>CAPACITY (lbs/kg)</b>                        | 20,000 / 9072 with adequate hitch load  | 24,000 / 10,886 with adequate hitch load  |
| <b>DECK LENGTH (ft-in/mm)</b>                   | 19'-0" / 5791 with 6'-0" / 1829 beavertail @ 10 deg.  | 19'-0" / 5791 with 6'-0" / 1829 beavertail @ 10 deg.  |
| <b>DECK HEIGHT (in/mm)</b>                      | 32.5" / 826 loaded  | 32.5" / 826 loaded  |
| <b>OVER-ALL WIDTH (ft-in/mm)</b>                | 8'-6" / 2591  | 8'-6" / 2591  |
| <b>TONGUE LENGTH (ft-in/mm)</b>                 | 5'-2" (1575mm)  | 5'-2" (1575mm)  |
| <b>RAMPS</b>                                    | Adj., 21" x 6'-0" lg., 15-deg. wood topped, 2-way spring assist   | Adj., 21" x 6'-0" lg., 15-deg. wood topped, 2-way spring assist   |
| <b>DECK TYPE</b>                                | 2" nominal white oak (flush deck), wood topped beavertail   | 2" nominal white oak (flush deck), wood topped beavertail   |
| <b>BRAKES</b>                                   | Electric with wet-cell break-away system (12.25" x 5")  | Electric with wet-cell break-away system (12.25" x 5")  |
| <b>TIRES</b>                                    | (8) 245/75R x 16, 10-ply, load range E  | (8) 245/75R x 16, 10-ply, load range E  |
| <b>WHEELS</b>                                   | (8) 6 x 16 budd type, 8 bolt  | (8) 6 x 16 budd type, 8 bolt  |
| <b>AXLES</b>                                    | (2) 12,000 lb. heavy-duty w/oil bath bearings   | (2) 12,000 lb. heavy-duty w/oil bath bearings   |
| <b>SUSPENSION</b>                               | 9700 Hutchens, adjustable   | 9700 Hutchens, adjustable   |
| <b>HITCH</b>                                    | Adjustable, heavy-duty 3" I.D. pintle ring  | Adjustable, heavy-duty 3" I.D. pintle ring  |
| <b>TIE DOWNS</b>                                | (6) heavy-duty 1" forged D-rings  | (6) heavy-duty 1" forged D-rings  |
| <b>PARKING JACK</b>                             | (1) 12,000 lb., drop-leg (bolted on)  | (1) 12,000 lb., drop-leg (bolted on)  |
| <b>SAFETY CHAINS</b>                            | 3/8" high tensile x 40" with safety latch hooks   | 3/8" high tensile x 40" with safety latch hooks   |
| <b>TOOL BOX</b>                                 | Standard, lockable  | Standard, lockable  |
| <b>MUD FLAPS</b>                                | Standard  | Standard  |
| <b>SIDE RAILS</b>                               | 8" channel iron   | 8" channel iron   |
| <b>MAIN FRAME</b>                               | W8 x 21, grade 50, cold-formed tongue   | W8 x 21, grade 50, cold-formed tongue   |
| <b>HEAD BOARD</b>                               | 5-1/2" high, channel iron   | 5-1/2" high, channel iron   |
| <b>X-MEMBERS</b>                                | High tensile 3" Jr. I-beam, 16" on center   | High tensile 3" Jr. I-beam, 16" on center   |
| <b>WIRING</b>                                   | Sealed modular harness with circuit breakers  | Sealed modular harness with circuit breakers  |
| <b>LIGHTING (reflectORIZED)</b>                 | Sealed beam, flush/shock mounted  | Sealed beam, flush/shock mounted  |
| <b>REG. HOLDER</b>                              | Standard  | Standard  |
| <b>FINISH (before decking)</b>                  | 5-stage polyurethane under and overcoat system  | 5-stage polyurethane under and overcoat system  |
| <b>NOTE</b>                                     |   | Subject to Federal Excise Tax   |
| <b>OPTIONS (other options may be available)</b> | <ul style="list-style-type: none"> <li>▪ Additional deck length</li> <li>▪ Additional tie downs</li> <li>▪ Dual parking jacks</li> <li>▪ Full air brakes w/ ABS</li> <li>▪ Gooseneck</li> <li>▪ Mini-fifth wheel</li> <li>▪ Spare tire/rim</li> </ul> | <ul style="list-style-type: none"> <li>▪ Special color (no metallic paints)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Winch and cable</li> <li>▪ 8'-0" over-all width</li> <li>▪ 25,000 lb., two speed jack</li> </ul>                             |
|   |   | <ul style="list-style-type: none"> <li>▪ Additional deck length</li> <li>▪ Additional tie downs</li> <li>▪ Dual parking jacks</li> <li>▪ Full air brakes w/ ABS</li> <li>▪ Gooseneck</li> <li>▪ Mini-fifth wheel</li> <li>▪ Spare tire/rim</li> </ul> |
|   |   | <ul style="list-style-type: none"> <li>▪ Special color (no metallic paints)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Winch and cable</li> <li>▪ 8'-0" over-all width</li> <li>▪ 25,000 lb., two speed jack</li> </ul>                             |