

Big TowTM

TRAILERS

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.

MODELS:
B-HD6, B-HD7
HYDRAULIC DUMP TRAILER

NEW
for 2005



Adjustable tri-swing gate



Loading ramps



45° dump angle



B-HD6, B-HD7

866-397-8481

Fax: 320-693-7921

www.bigtowtrailers.com




Big TowTM

TRAILERS

MODELS: B-HD6, B-HD7

HYDRAULIC DUMP TRAILER

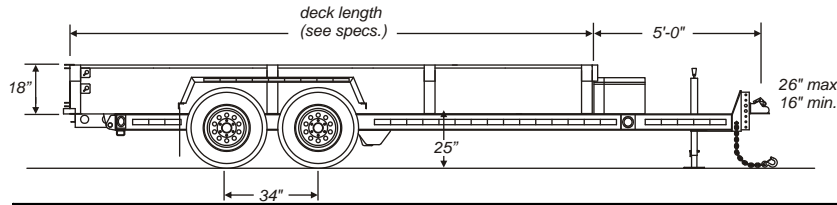

* **Optional end gate winch (shown on front) is used to open and/or hold open end gate while the dump box is being emptied for lighter material that may not be heavy enough to open the end gate while dumping.**

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow Trailers dealer for details.

Specifications	B-HD6	B-HD7
WEIGHT (lbs/kg)	3,700 / 1678 or 3,900 / 1769 or 4,100 / 1860	4,000 / 1814 or 4,200 / 1904 or 4,400 / 1995
CAPACITY (lbs/kg)	12,000 / 5443 with adequate hitch load	14,000 / 6350 with adequate hitch load
DECK LENGTH (ft-in/mm)	12'-0" / 3658 or 14'-0" / 4267 or 16'-0" / 4877	12'-0" / 3658 or 14'-0" / 4267 or 16'-0" / 4877
DECK HEIGHT (in/mm)	25" / 635 empty	25" / 635 empty
OVER-ALL WIDTH (ft-in/mm)	8'-6" / 2591	8'-6" / 2591
LOAD WIDTH (in/mm)	82" / 2083 fits most larger skid steers	82" / 2083 fits most larger skid steers
TONGUE LENGTH (ft-in/mm)	5'-0" / 1524	5'-0" / 1524
TILT ANGLE	45 degrees	45 degrees
SCISSOR HOIST (lbs/kg)	7-ton on 12' and 14', 10-ton on 16' – power up/gravity down	7-ton on 12' and 14', 10-ton on 16' – power up/gravity down
BATTERY	12V deep cycle (with battery charger)	12V deep cycle (with battery charger)
RAMPS	6'-0" long, stored under bed	6'-0" long, stored under bed
DECK TYPE	7 ga. steel floor	7 ga. steel floor
BRAKES	Electric, with wet cell break-a-way (12" x 2")	Electric, with wet cell break-a-way (12.25" x 2.5")
TIRES	(4) 235/85R x 16, 10 ply, load range E	(4) 215/75R x 17.5, 16 ply, load range H
WHEELS	(4) 6" x 16" white modular (6 bolt on 5.5" b.c.)	(4) 6" x 17.5" (8 bolt)
AXLES	(2) 6,000 lb. Torflex, with E-Z lube hubs	(2) 7,200 lb. Torflex, with E-Z lube hubs
HITCH	Adjustable, 2 5/16" ball coupler or 3" i.d. pintle ring	Adjustable, 2 5/16" ball coupler or 3" i.d. pintle ring
TIE DOWNS	(4) D-rings - 1 each corner	(4) D-rings - 1 each corner
PARKING JACK	(1) 12,000 lb. drop-leg (bolted on)	(1) 12,000 lb. drop leg (bolted on)
SAFETY CHAINS	3/8" x 40" long with safety hooks and latches	3/8" x 40" long with safety hooks and latches
TOOL BOX	Optional	Optional
MUD FLAPS	Standard	Standard
SIDES	18" high, optional 18" and 24" add-on kits are also available	18" high, optional 18" and 24" add-on kits are also available
MAIN FRAME	High tensile W6 x 12 beam (one pc. cold formed)	High tensile W6 x 12 beam (one pc. cold formed)
X-MEMBERS	3" channel, 16" on center	3" channel, 16" on center
WIRING	Sealed modular harness with circuit breakers	Sealed modular harness with circuit breakers
LIGHTING (reflectorized)	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
REG. HOLDER	Standard	Standard
OTHER FEATURES	Pallet fork holders both sides	Pallet fork holders both sides
FINISH (before decking)	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system
OPTIONS (other options may be available)	<ul style="list-style-type: none"> ▪ 10-ton hoist on 14' model, not available on 12' model. Adds to lift capacity NOT GVWR. ▪ Tarp with mounting brackets ▪ Spare tire/rim ▪ Tire carrier ▪ Wireless remote for pump ▪ Additional tie downs ▪ Gooseneck ▪ 18" tall bolt-on sides ▪ 24" tall bolt on sides 	<ul style="list-style-type: none"> ▪ Special color (no metallic paints) ▪ Poly tool box ▪ 10K hyd. Jack ▪ Tarp rod ▪ Double doors (available in 36" or 42" height only) ▪ Hyd. Surge brakes w/free backing (check local D.O.T. laws)
		<ul style="list-style-type: none"> ▪ 10-ton hoist on 14' model, not available on 12' model. Adds to lift capacity NOT GVWR. ▪ Tarp with mounting brackets ▪ Spare tire/rim ▪ Tire carrier ▪ Wireless remote for pump ▪ Additional tie downs ▪ Gooseneck ▪ 18" tall bolt-on sides ▪ 24" tall bolt on sides
		<ul style="list-style-type: none"> ▪ Special color (no metallic paints) ▪ Poly tool box ▪ 10K hyd. Jack ▪ Tarp rod ▪ Double doors (available in 36" or 42" height only)

TOLL FREE: 866-397-8481 Fax: 320-693-7921 www.bigtowtrailers.com