

# Big Tow<sup>TM</sup>

## TRAILERS

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.

MODELS:  
BE-10, BE-12  
DECK OVER TRAILER



BE-10, BE-12

866-397-8481

Fax: 320-693-7921


[www.bigtowtrailers.com](http://www.bigtowtrailers.com)



# Big Tow<sup>TM</sup>

## TRAILERS

MODELS:  
BE-10, BE-12  
DECK OVER TRAILER

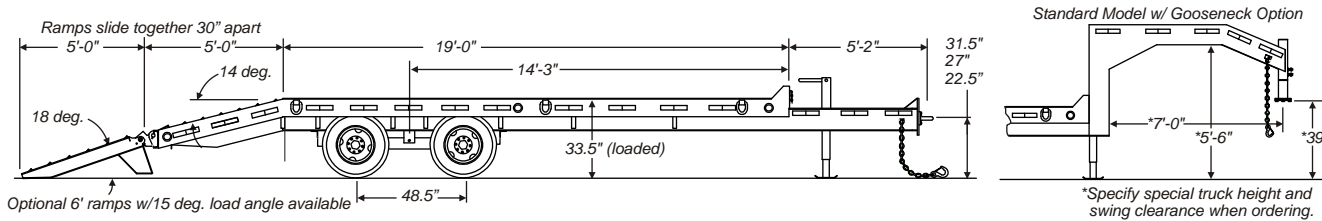

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow Trailers dealer for details.

Specifications	BE-10	BE-12
<b>WEIGHT (lbs/kg)</b>	5,900 / 2676	7,080 / 3211
<b>CAPACITY (lbs/kg)</b>	20,000 / 9072 with adequate hitch load	24,000 / 10,886 with adequate hitch load
<b>DECK LENGTH (ft-in/mm)</b>	19'-0" / 5791 with 5'-0" beavertail @ 14 deg.	19'-0" / 5791 with 5'-0" beavertail @ 14 deg.
<b>DECK HEIGHT (ft-in/mm)</b>	33.5" / 851 loaded	33.5" / 851 loaded
<b>OVER-ALL WIDTH (ft-in/mm)</b>	8'-6" / 2591	8'-6" / 2591
<b>TONGUE LENGTH (ft-in/mm)</b>	5'-2" / 1575	5'-2" / 1575
<b>RAMPS (ft-in/mm)</b>	Adj. 21" x 5'-0" long, spring assist (off the ground)	Adj. 21" x 5'-0" long, spring assist (off the ground)
<b>DECK TYPE</b>	2" nominal white oak (flush deck), angle iron beavertail	2" nominal white oak (flush deck), angle iron beavertail
<b>BRAKES</b>	Electric, with wet cell break-away, 12.25"x 3.38"	Electric, with wet cell break-away, 12.25"x 5"
<b>TIRES</b>	(8) 235/85R x 16, 10 ply, load range E	(8) 235/85 x 16 Bias 12 ply
<b>WHEELS</b>	(8) 6" x 16" budd type, 8-bolt	(8) 6" x 16" budd type, 8-bolt
<b>AXLES</b>	(2) 10,000 lb. general duty w/ oil bath bearings	(2) 12,000 lb. w/ oil bath bearings
<b>SUSPENSION</b>	Slipper spring	Slipper spring
<b>HITCH</b>	Adjustable heavy-duty 3" I.D. pintle ring	Adjustable heavy-duty 3" I.D. pintle ring
<b>TIE DOWNS</b>	(6) heavy-duty 1" forged D-rings	(6) heavy-duty 1" forged D-rings
<b>PARKING JACK</b>	Single 12K drop-leg (bolted on)	Single 12K drop-leg (bolted on)
<b>SAFETY CHAINS</b>	3/8" high tensile x 40" with safety latch hooks	3/8" high tensile x 40" with safety latch hooks
<b>TOOL BOX</b>	Standard, (Lid optional)	Standard, (Lid optional)
<b>MUD FLAPS</b>	Standard	Standard
<b>SIDE RAILS</b>	8" channel iron	8" channel iron
<b>MAIN FRAME</b>	W10 x 17, gr. 50, one piece cold-formed tongue/frame	W10 x 17, gr. 50, one piece cold-formed tongue/frame
<b>HEAD BOARD</b>	5.5" high, channel iron	5.5" high, channel iron
<b>X-MEMBERS</b>	High tensile 3" jr. I-beam, 16" o.c.	High tensile 3" jr. I-beam, 16" o.c.
<b>WIRING</b>	Sealed modular harness	Sealed modular harness
<b>LIGHTING (reflectorized)</b>	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
<b>REG. HOLDER</b>	Standard	Standard
<b>FINISH (before decking)</b>	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system
<b>NOTE</b>	Subject to Federal Excise Tax	
	<ul style="list-style-type: none"> <li>▪ Additional deck length</li> <li>▪ Additional tie downs</li> <li>▪ Double break beavertail</li> <li>▪ Dual parking jacks</li> <li>▪ Full air brakes w/ABS</li> <li>▪ Gooseneck</li> <li>▪ Spare tire/rim</li> <li>▪ 25,000 lb. two-speed jack</li> </ul>	<ul style="list-style-type: none"> <li>▪ Special color (no metallics)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Tool box lid</li> <li>▪ Two-way spring assist ramps</li> <li>▪ Winch and cable</li> <li>▪ 6'-0" beavertail / 6'-0" ramps</li> <li>▪ 8'-0" overall width</li> </ul>
		<ul style="list-style-type: none"> <li>▪ Additional deck length</li> <li>▪ Additional tie downs</li> <li>▪ Double break beavertail</li> <li>▪ Dual parking jacks</li> <li>▪ Full air brakes w/ABS</li> <li>▪ Gooseneck</li> <li>▪ Mini fifth wheel</li> <li>▪ Spare tire/rim</li> <li>▪ Radial Tires</li> </ul>
		<ul style="list-style-type: none"> <li>▪ Special color (no metallics)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Tool box lid</li> <li>▪ Two-way spring assist ramps</li> <li>▪ Winch and cable</li> <li>▪ 6'-0" beavertail / 6'-0" ramps</li> <li>▪ 8'-0" overall width</li> <li>▪ 25,000 lb. two-speed jack</li> </ul>

TOLL FREE: 866-397-8481 Fax: 320-693-7921 [www.bigtowtrailers.com](http://www.bigtowtrailers.com)